



CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // SILENT




// CL8912S (120cm)



The CL8912S or CL8915S wallmount rangehood comes with silent air extraction from the Isodrive® motor system. It is constructed with the highest quality stainless steel and designed to withstand the harsh New Zealand environment.

The pyramid design ensures a large extraction zone to effectively capture smoke and airborne grease over any barbecue via 4-speed touch, remote control and 10-minute auto-shutoff function.

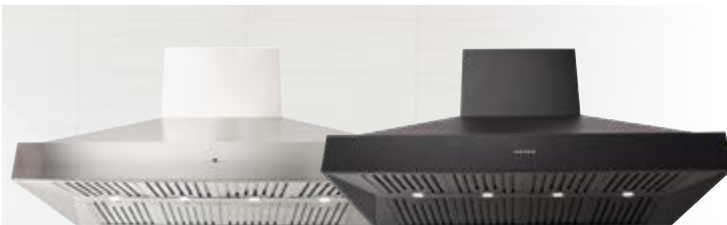

// CL8915S (150 cm, stainless steel) and CL8915BS (150 cm, matte black)



// CL8912BS (120 cm, matte black) and CL8912S (120 cm, stainless steel)

PRODUCT DESCRIPTION

- quality 304 grade stainless steel and matte black available
- silent Isodrive® motor
- 4 speed touch sensitive controls, with remote
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffles
- 5 Year rangehood Warranty

ISODRIVE® OPTIONS


- **SP2** twin external motor
 - 3000 m³/h airflow
 - 200mm SteelFlex™ ducting (2 x 6m)
 - install roof/wall
 - rated power: 310W
- **SE** single external motor
 - 3200 m³/h airflow
 - 250mm SteelFlex™ ducting (4m)
 - 200mm SteelFlex™ ducting (2m)
 - SE accessory kit required
 - install roof/wall
 - rated power: 137W

TECHNICAL DATA

- **CL8912S** dimensions: (W x D) 1200 x 800 mm, 6 x baffles, 4 x LED lights
- **CL8915S** dimensions: (W x D) 1500 x 800 mm, 8 x baffles, 4 x LED lights



CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // SILENT

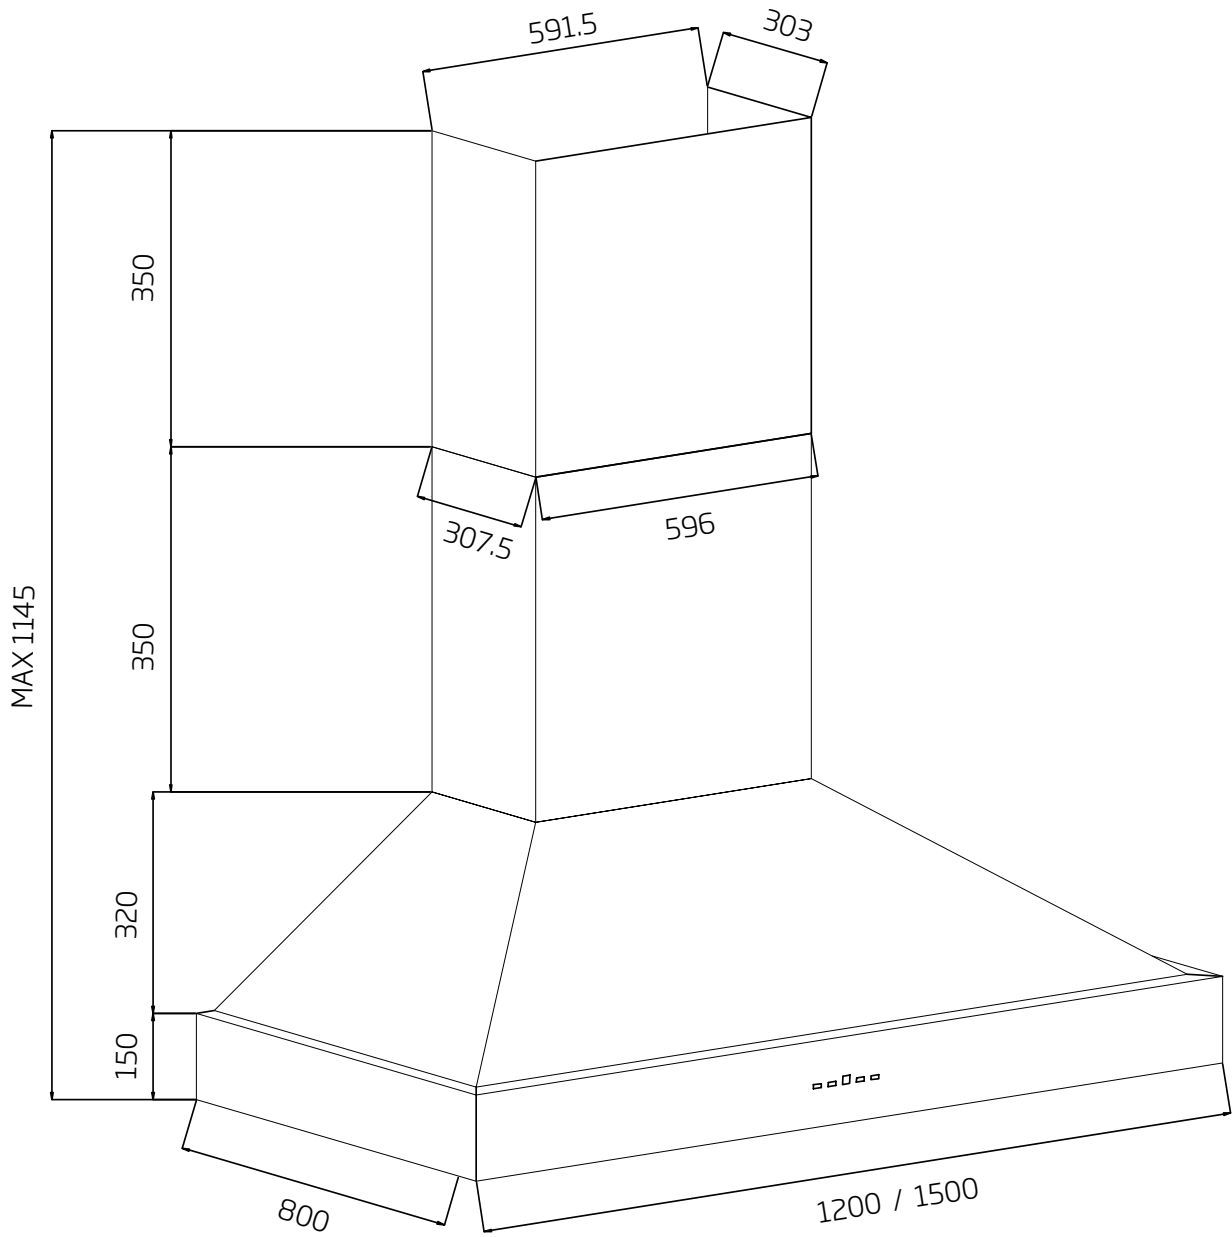

Model: CL8912S, CL8912BS, CL8915S, CL8915BS
Feeding Voltage: 220-240V 50Hz
Max Lamp Power: 4 x 3W
ILCOS Code: DRR-3-H-GU10-51/55