

**SILENT UNDERMOUNT RANGEHOOD 60cm UM1390-6S, 90cm UM1390-9S, 120cm UM1390-12S**



- **innovative design** - this stainless steel undermount rangehood integrates seamlessly with kitchen cabinetry.
- **powerful silent extraction** - the German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke, and odour removal - leaving your kitchen air fresher.
- **convenient features** - soft-touch controls and digital display, 5 speed levels and 15 minute auto shut-off timer.
- **high quality mesh filters** - durable steel clip, dishwasher safe, lifetime warranty

## SILENT UNDERMOUNT RANGEHOOD **60cm** UM1390-6S, **90cm** UM1390-9S, **120cm** UM1390-12S

### DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 3 Year Warranty on Canopy

### TECHNICAL DATA

#### UM-1390-6S

- dimensions: (W x D)  
598 x 390 mm
- 2 x filters

#### UM-1390-9S

- dimensions: (W x D)  
898 x 390mm
- 3 x filters



#### UM-1390-12S\*

- dimensions: (W x D)  
1198 x 390 mm
- 4 x filters



### MOTOR OPTIONS

- **S1 650**- single external motor (60cm only)
  - 650 m<sup>3</sup>/h airflow
  - 200mm flexi ducting
  - install roof/wall/eave
- **ST 900** - single external motor
  - 900 m<sup>3</sup>/h airflow
  - 200mm flexi ducting (6m)
  - install roof/wall
- **SP 1600** - single external motor
  - 1600 m<sup>3</sup>/h airflow
  - 200mm flexi ducting (6m)
  - install roof/wall
- **SE 3200** - single external motor (90cm & 120cm only)
  - 3200 m<sup>3</sup>/h airflow
  - 200mm flexi ducting (6m)
  - install roof/wall

**UM1390-6S // 90CM**  
AIR OUTLET Ø200

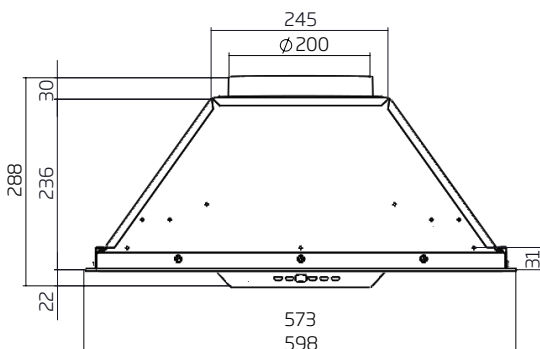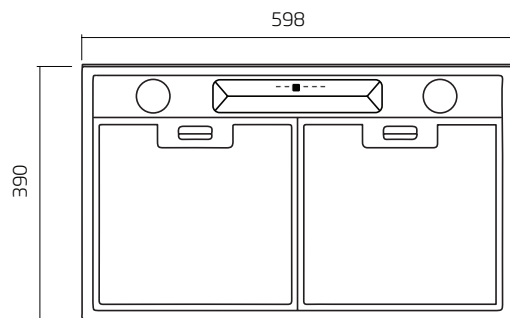

**UM1390-9S, UM1390-12S // 90CM & 120CM**  
AIR OUTLET Ø200

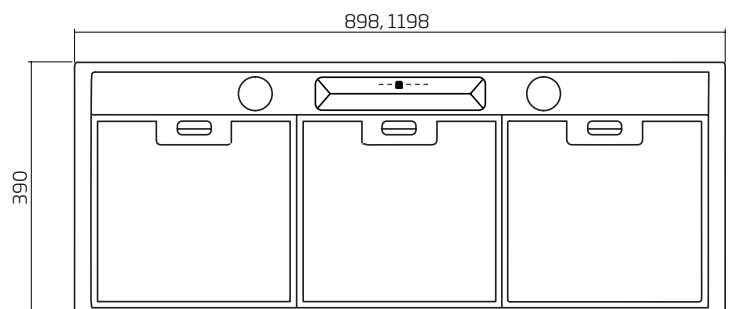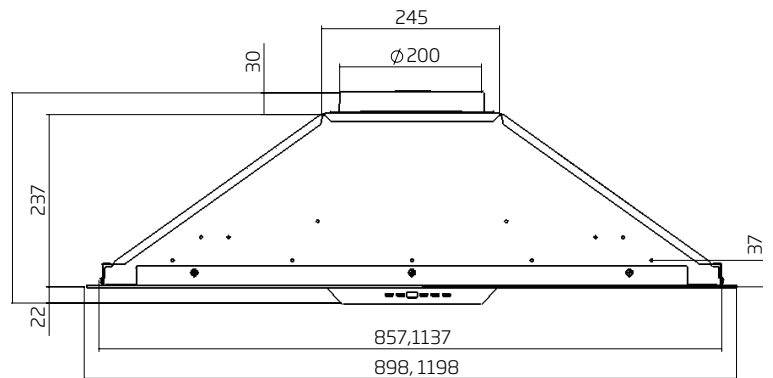

\*Note: The UM1390-12S has 4 filters